


Multi-Module III

Product description:

- Depending on the variant, control of one or two heaters
- Main sensor for switching the cooktop on and off
- Fault display
- Can be used with all popular types of vitroceramics
- Safety cut-out (permanent operation)
- Power failure by-pass
- Three sensors per heater possible
- Automatic start-to-boil option
- Integrated calculated residual heat display
- Operating time limit
- Control available for horizontal mounting
- Heat setting display one-place 10 mm
- Two-zone switch for a heater with LED display, optional
- Communication with pot/pot size detection, optional
- Ambient temperature monitoring, optional

Technical specifications

Operating temperature	0 °C to +85 °C (105 °C on request)
Mains voltage	230/240 V, 50/60 Hz
Approval	corresponds to VDE guidelines
Relays	max. 3 relays for zones
Connectors (Faston 6.3 mm) for	mains voltage and zones

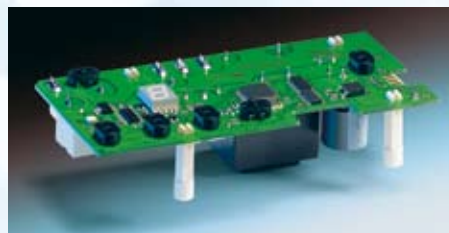

Multi-Module III



Multi-Module in laboratory