


SCM VI

Thanks to the especially comfortable operating concept, using the SCM VI is intuitive for every user. The selection of heater and heat setting occurs with a single fingertip.

Product description:

- Slim-line design for horizontal front mounting
- Main sensor for switching the cooktop on and off
- Control of up to four heaters
- Direct simultaneous heater selection and operation via one slider per heater
- Locking sensor
- Can be used with all popular types of vitroceramics
- Integrated, freely-assignable dual/triple zone switch for up to four heaters
- Automatic start-to-boil option
- Calculated residual heat display
- Operation time limit depending on the heat setting selected
- Switching mains voltage with wide-range input and stand-by < 1W
- Programming mode

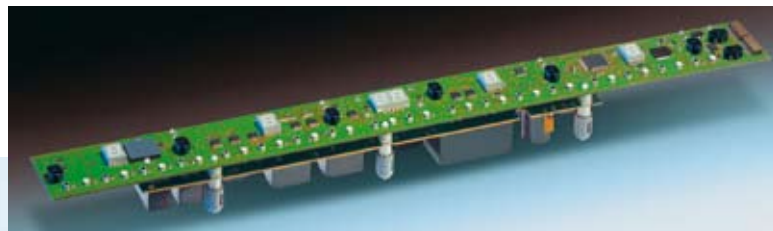

SCM VI

Options:

- Main relay (full isolation of the load from the mains)
- „Timer“ variant with five timers, can be used as interval timer. Each heater can be assigned any timer
- Stop-and-go function for brief interruptions of cooking

Technical specifications

Operating temperature	0 °C to +85 °C (105 °C on request)
Mains voltage	230/240 V, 400 V, 50/60Hz
Approval	VDE ÜG
Relays	max. 8 Relais für verschiedene Heizkreise max. 2 Relais für allpolige Netztrennung, 230 VAC/16A optional
Connectors (Faston 6.3 mm) for	mains voltage and zones